

4" (102 mm) Submersible Trash Pump




- Self-priming abrasion resistant impeller pump.
- Up to 900 gpm (3,407 lpm).
- Replaceable wear plates.
- Can be run dry without damage.
- No clog impeller.
- Carry handle.
- 4" NPT discharge – will pass 3" (76 mm) solids.
- Locking coupler for discharge hose supplied standard.

CAT. NO.	UPC NO.	DESCRIPTION
€ H4670	42192	Submersible Trash Pump
F020196K	41778	Body 1/2" NPTF
F020197K	41779	Nose Piece 1/2" NPTF

SPECIFICATIONS

System	Open- and Closed-Center
Capacity	Up to 900 gpm (3,407 lpm) [at 9 gpm (34 lpm) and a 0' (0 m) head height]
Intake Port	4" (102 mm) NPT
Discharge Port	4" (102 mm) NPT
Weight	59 lb. (26.7 kg)
Height	15.75" (400 mm)
Width	14.5" (368 mm) diameter
Flow Range	5 - 9 gpm (19 - 34 lpm)
Operating Pressure	0 - 2,000 psi (0 - 140 bar)
Pressure Port Thread	1/2" NPTF
Return Port Thread	1/2" NPTF

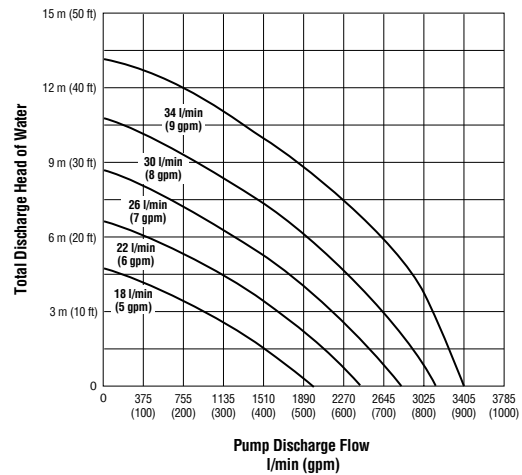

Submersible Pump Accessories



CAT. NO.	UPC NO.	DESCRIPTION	USE FOR CAT./UPC NO.				
			H4665A/42191	H4660B/42190	H4630/49333	H4635/49334	H4670/42192
156340	41220	2" Diameter x 25' Discharge Hose Assembly	X				
F024772	42104	2" Cam Lock Coupling for Discharge Hose	X				
156339	41219	2.5" Diameter x 25' Discharge Hose Assembly		X			
F024775	42105	2.5" Cam Lock Coupling for Discharge Hose		X			
154955	41189	4" Diameter x 25' Discharge Hose Assembly					X
49499	49499	3" Diameter x 25' Discharge Hose Assembly			X	X	